


Part #: D-004CALT5KM

4 CHANNEL

D-Series Distribution Mil-Tac Cables

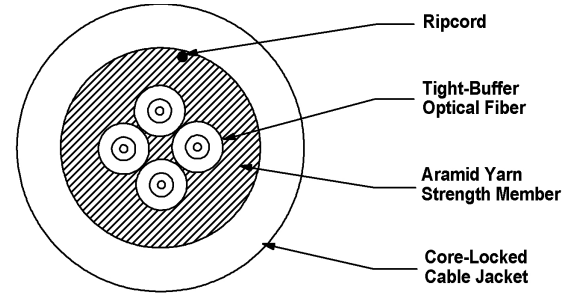

Ultra-Fox™ Plus Fiber Performance	
Fiber Code	ALT
Industry Standard Designation	Laser Optimized OM3 ISO/IEC 11801
Core/Cladding Diameter (µm)	50/125
Numeric Aperture	0.20
Wavelength (nm)	850/1310
Gigabit Ethernet Distance (m)	1000/600
10-Gigabit Ethernet Distance (m)	300/300
Maximum Cabled Attenuation (dB/km)	3.0/1.0
Minimum Laser EMB Bandwidth (MHz-km)	2000/500
Minimum OFL LED Bandwidth (MHz-km)	1500/500
Primary Coating Diameter (µm)	500
Secondary Buffer Diameter (µm)	900
Proof Test Level (kpsi)	100

Installation and Operating Characteristics		
	Installation	Operating
Max Tensile Load	1,800 N (400 lbs)	600 N (130 lbs)
Min Bend Radius	5.5 cm (2.2 in)	2.8 cm (1.1 in)


Mechanical and Environmental	
Impact Resistance EIA/TIA-455-25A, Military Req.	200 Impacts
Crush Resistance TIA/EIA-455-41A, Military Req.	440 N/cm
Operating Temperature	-55°C to +85°C
Storage Temperature	-70°C to +85°C

Cable Characteristics	
Jacket Color	Black
Jacket Material	Polyurethane
Buffer Material	Hard Elastomeric
Cable Weight	27 kg/km (18 lbs/1000')
Cable Diameter	5.5 mm (0.22 in)

4 CHANNEL

D-Series Distribution Mil-Tac Cables

Part #: D-004CALT5KM

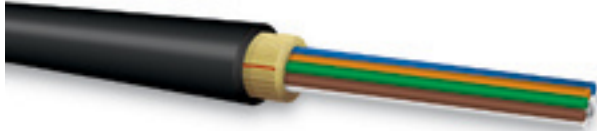

Applications

- Ground-tactical cable that is ideal for use in harsh environments where deployment and retrieval for reuse is required

Features

- Extremely strong, lightweight, rugged, survivable tight-buffered cables designed for military tactical field use and commercial applications
- Compact, round cable design for ease of transportation and deployment
- Core-locked jacket for improved mechanical performance
- Designed for use in adverse environments where reduced size and weight are important
- Helically stranded cable core for flexibility, deployment survivability and exceptional mechanical protection for the optical fibers
- Cables have been tested and are in use in military data communications applications worldwide
- Can be used outdoors for temporary deployment directly on the ground in all terrains, including severe environments
- Suitable for industrial, mining and petrochemical environments - chemical resistant
- Crush-resistant and resilient with a thick layer of aramid strength members
- Polyurethane jacketed for abrasion, cut and chemical resistance
- Most commonly used with ruggedized multiway military tactical field connectors, for maximum connector retention (400lbs.)
- Tactical Polyurethane (C) outer jacket material is standard; Flame-Retardant Tactical (V) and Low-Smoke Zero-Halogen (G) outer jacket materials are available
- Ultra-Fox Plus Fiber (500µm) used for environmental and mechanical protection

OCC Provided Options:

- Mil-Tac cables prespooled on deployable reels for a ready-to-use product
- Mil-Tac cables can be pre-terminated with single-fiber or ruggedized multichannel connectors upon request